

For liquid or gel electrolyte lead acid batteries



15 - 60 Ah




COMPLETELY AUTOMATIC + Battery tester

- 100% recharge with the «Floating process»
 - stop main charge at 14.8 V
 - maintenance floating at 13.8 V
- no tension on the clips, so no sparks
no risk of reversal of polarity and a buzzer shows the reversal of polarity
- Possibility to charge without disconnecting the battery
- 2 levels of charging current
- 3 led indicators for "Test" and "Charge" functions
- 1 indicator for presence of main supply
- Isolated charging clamps
- Integrated place for storing cables and clamps.






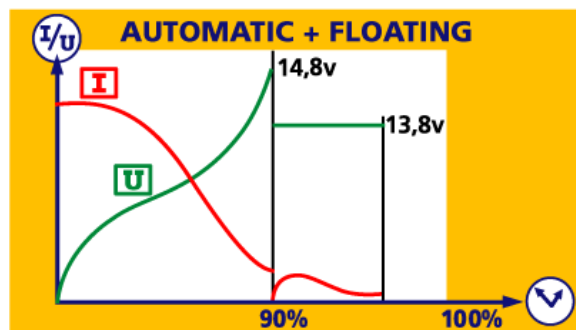


Réf. 023253





 NORMES EUROPÉENNES - EUROPEAN STANDARDS
 EUROPÄISCHE NORM - NORMAS EUROPEAS
 EUROPESE NORM


 EN 60335-2-29

				EFFICACE /RMS	MOYEN /AVERAGE	START 1V/C	FUSE		
230V	85W	12V	2	6A	2-4A	-	10A	16,5x11x29 cm	2,5 kg